

FIG. 1

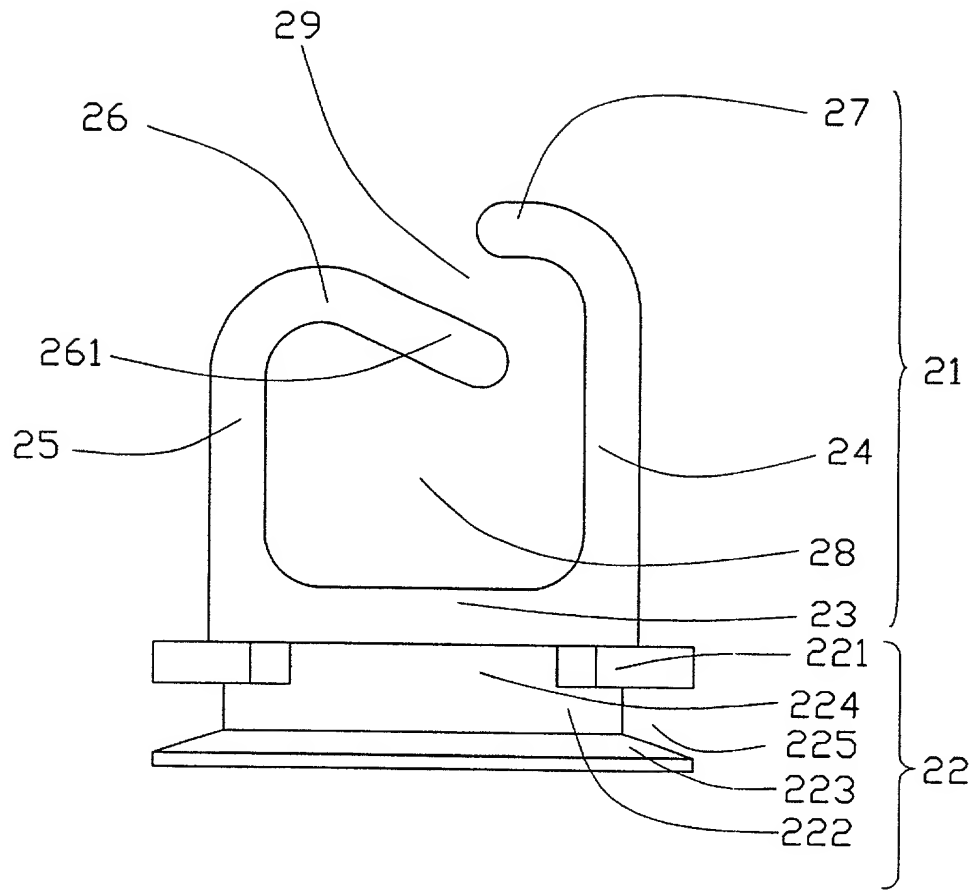


FIG. 2





FIG. 5 is a perspective view of the device 100 in a closed position. The device 100 includes a base 4, a first arm 5, a second arm 6, a first hinge 21, a second hinge 22, a first spring 23, a second spring 24, a first stop 25, a second stop 26, a first latch 27, and a second latch 28. The first arm 5 is pivoted to the base 4 at the first hinge 21. The second arm 6 is pivoted to the base 4 at the second hinge 22. The first spring 23 is connected to the first arm 5 and the second arm 6. The second spring 24 is connected to the first arm 5 and the second arm 6. The first stop 25 is located on the first arm 5. The second stop 26 is located on the second arm 6. The first latch 27 is located on the first arm 5. The second latch 28 is located on the second arm 6.

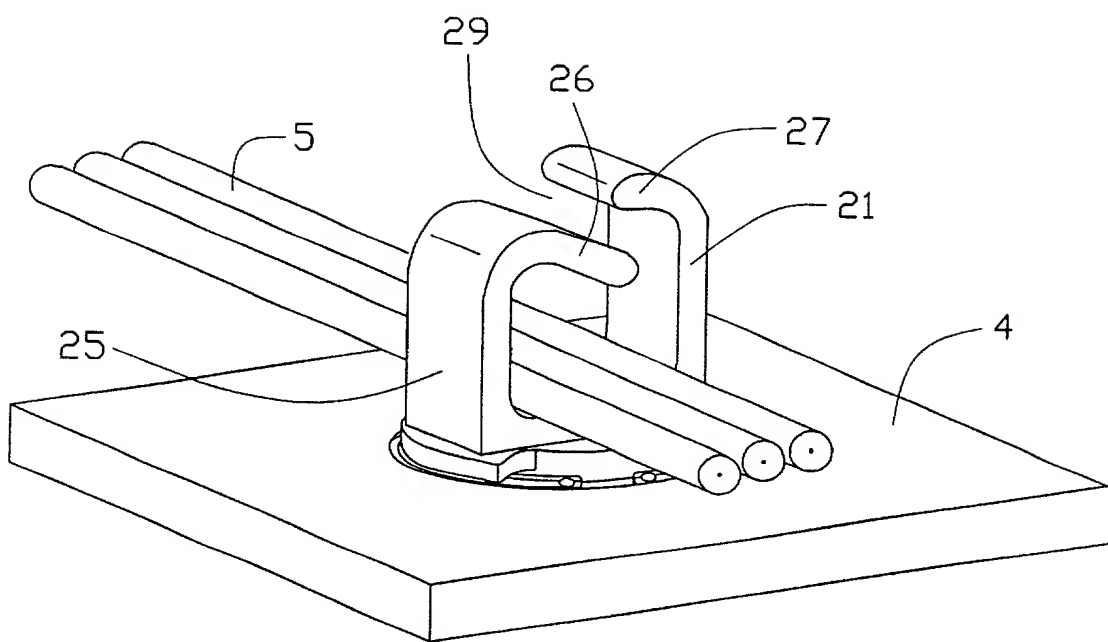


FIG. 5